


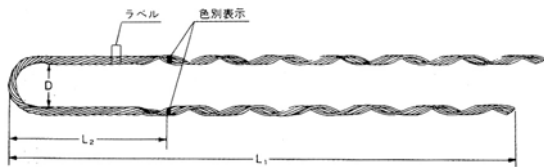


亜鉛めっき鋼より線

(亜鉛めっき鋼より線 JIS G3537に準拠)

号別	構成素線数 標準素線径 mm	計 算 外 径 mm	標 準 断 面 積 mm ²	鋼より線引張荷重						(参考) 単位質量 kg/km
				1種		2種		3種		
				kN	tf	kN	tf	kN	tf	
1号  1×3	3 / 2.90	6.2	19.8	22.4	2.28	16.1	1.64	12.6	1.28	156
	3 / 3.20	6.9	24.1	27.4	2.79	19.6	2.00	15.2	1.55	190
	3 / 3.50	7.5	28.9	32.5	3.31	23.4	2.39	18.2	1.86	228
	3 / 4.00	8.6	37.7	42.5	4.33	30.6	3.12	23.8	2.43	297
	3 / 4.30	9.3	43.6	49.2	5.02	35.5	3.62	27.7	2.82	344
	3 / 4.50	9.7	47.7	53.8	5.49	38.7	3.95	30.0	3.06	376
2号  1×7	7 / 1.00	3.0	5.50	6.19	0.631	4.48	0.457	3.47	0.354	43.5
	7 / 1.20	3.6	7.92	8.90	0.908	6.44	0.657	4.99	0.509	62.7
	7 / 1.40	4.2	10.8	12.2	1.24	8.78	0.895	6.83	0.696	85.3
	7 / 1.60	4.8	14.1	15.9	1.62	11.5	1.17	8.90	0.908	111
	7 / 1.80	5.4	17.8	20.1	2.05	14.4	1.47	11.3	1.15	141
	7 / 2.00	6.0	22.0	24.8	2.53	17.8	1.82	13.9	1.42	174
	7 / 2.30	6.9	29.1	32.8	3.34	23.6	2.41	18.3	1.87	230
	7 / 2.60	7.8	37.2	42.0	4.28	30.2	3.08	23.5	2.40	294
	7 / 2.90	8.7	46.2	52.2	5.32	37.6	3.83	29.2	2.98	366
	7 / 3.20	9.6	56.3	63.7	6.50	45.7	4.66	35.6	3.63	446
	7 / 3.50	10.5	67.3	75.8	7.73	54.7	5.58	42.5	4.33	533
	7 / 3.80	11.4	79.3	89.6	9.14	64.4	6.57	50.1	5.11	628
	7 / 4.00	12.0	88.0	99.1	10.1	71.4	7.28	55.6	5.67	696
		7 / 4.30	12.9	102	115	11.7	82.8	8.44	64.4	6.57
	7 / 4.50	13.5	111	126	12.8	90.3	9.21	70.1	7.15	881
	7 / 5.00	15.0	137	155	15.8	112	11.4	86.5	8.82	1090
3号  1×19	19 / 1.60	8.0	38.2	42.1	4.29	30.4	3.10	23.6	2.41	304
	19 / 1.80	9.0	48.3	53.3	5.44	38.4	3.92	29.8	3.04	384
	19 / 2.00	10.0	59.7	65.9	6.72	47.5	4.84	36.9	3.76	474
	19 / 2.30	11.5	78.9	87.0	8.87	62.8	6.40	48.8	4.98	627
	19 / 2.60	13.0	102	112	11.4	80.1	8.17	62.4	6.36	802
	19 / 2.90	14.5	125	138	14.1	100	10.2	77.5	7.90	997
	19 / 3.20	16.0	153	170	17.3	122	12.4	94.4	9.63	1210
	19 / 3.50	17.5	183	201	20.5	145	14.8	113	11.5	1450
		19 / 4.00	20.0	239	263	26.8	189	19.3	147	15.0


鋼より線巻付グリッ (落石防止網用)




呼称 (^m / _m)	ローブ径 (^m / _m)	クリップ寸法				掌握力 (kg・f)	色別 表示
		構成 素線径×本	L ₁ (^m / _m)	L ₂ (^m / _m)	D (^m / _m)		
8	3×7 G/O 8	2.48×5	700	160	35	3,160以上	黒
10	3×7 G/O 10	2.48×6	800	160	35	4,940以上	青
12	3×7 G/O 12	2.80×6	900	200	35	7,110以上	黄
14	3×7 G/O 14	3.45×6	1,000	200	35	9,680以上	緑
16	3×7 G/O 16	3.45×7	1,100	200	35	12,600以上	赤
18	3×7 G/O 18	4.20×6	1,300	200	35	16,000以上	黒

クリップの素材はJIS G3506 (硬鋼線材)に規定するSWRH62Bの材質を使用し、素線は全面一様に溶融亜鉛メッキを施してあります。


鋼より線巻付グリッ (支線用)



▲FIG. 1

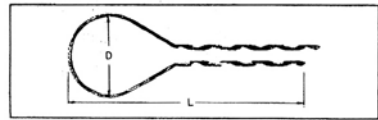

▲FIG. 2

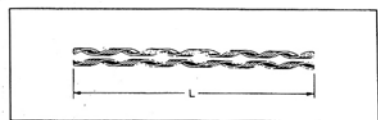

▲FIG. 3

型番	適用線 鋼燃線 (mm ²)	シンプル用		玉碍子用		木柱用		太径木柱用		直線用 FIG3	入数
		FIG1		FIG1		FIG2		FIG2			
		L	G	L	G	L	G	L	G		
SGD - 8	8	380	35	380	65	350	180	-	-	440	100
SGD - 11	11	430	35	430	65	620	180	-	-	540	100
SGD - 12	12	570	35	570	57	870	180	-	-	900	100
SGD - 14	14	460	35	460	65	650	180	-	-	600	100
SGD - 18	18	570	35	570	65	760	180	-	-	820	100
SGD - 22	22	570	45	570	65	870	180	1170	320	900	50
SGD - 30	30	610	45	610	65	910	180	1170	320	1000	50
SGD - 38	38	660	45	660	65	980	190	-	-	1100	30
SGD - 45	45	710	45	710	65	1030	190	1360	320	1200	50
SGD - 55	55	750	45	750	65	1120	210	-	-	1300	30
SGD - 70	70	800	45	800	65	1170	210	1690	320	1400	30
SGD - 90	90	900	45	900	65	1320	230	1690	320	1500	30
SGD - 110	110	1100	65	1100	65	1500	230	-	-	1900	20
SGD - 135	135	1200	65	1200	65	1580	230	-	-	2000	20